

FIG. 1 is a block diagram of a network system 10. The system includes a central server 14, a network 16, and four terminals 12. The central server 14 is connected to the network 16 via a bidirectional arrow. Each terminal 12 is connected to the network 16 via a bidirectional arrow. The network 16 is represented by a cloud shape. The terminals 12 are represented by rectangular boxes. The central server 14 is represented by a rectangular box. The network system 10 is indicated by a curved arrow pointing to the entire system.

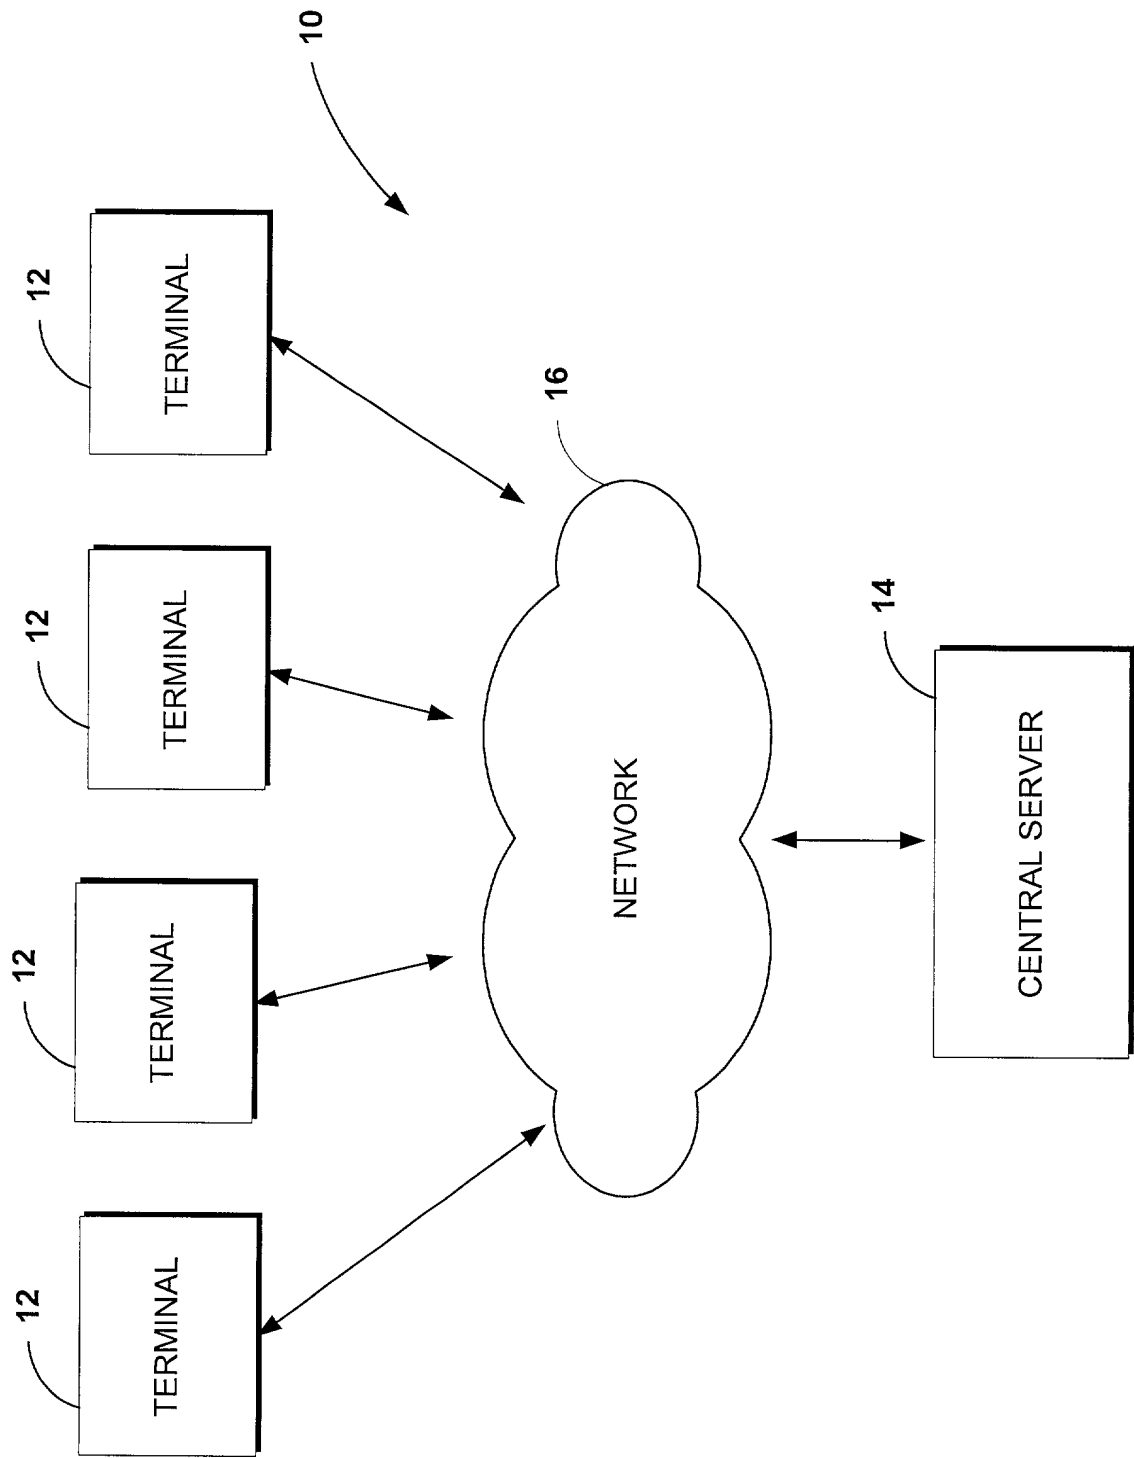


FIG. 1.

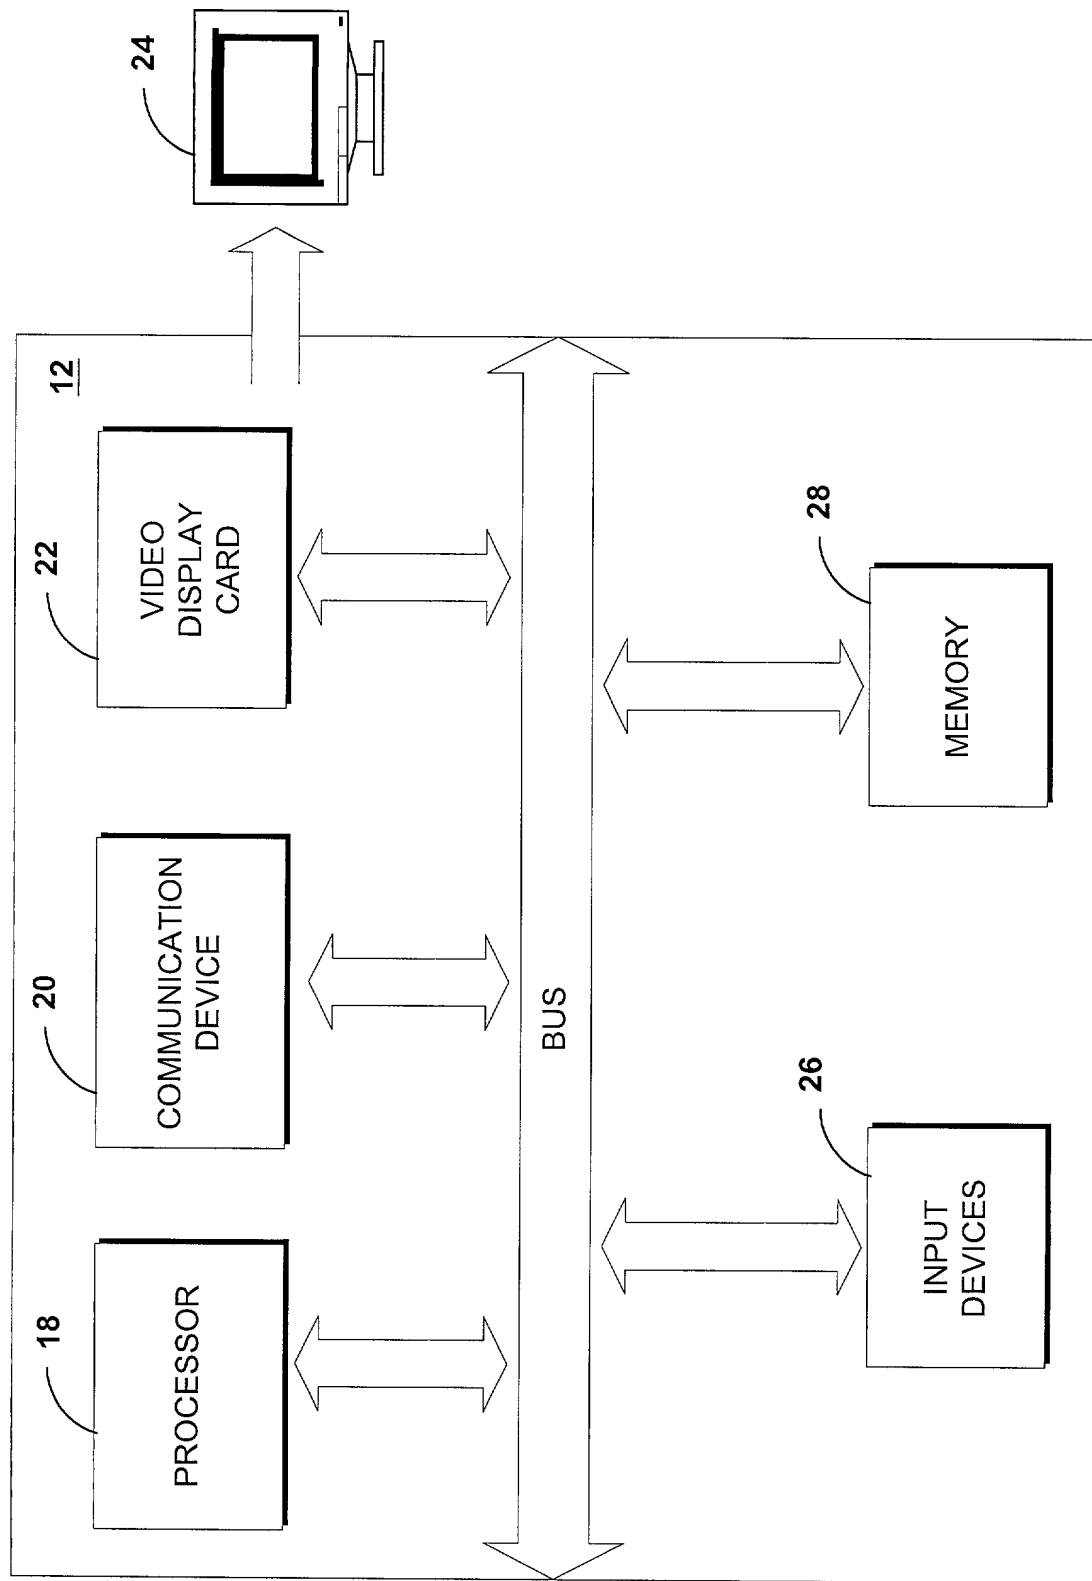


FIG. 2.

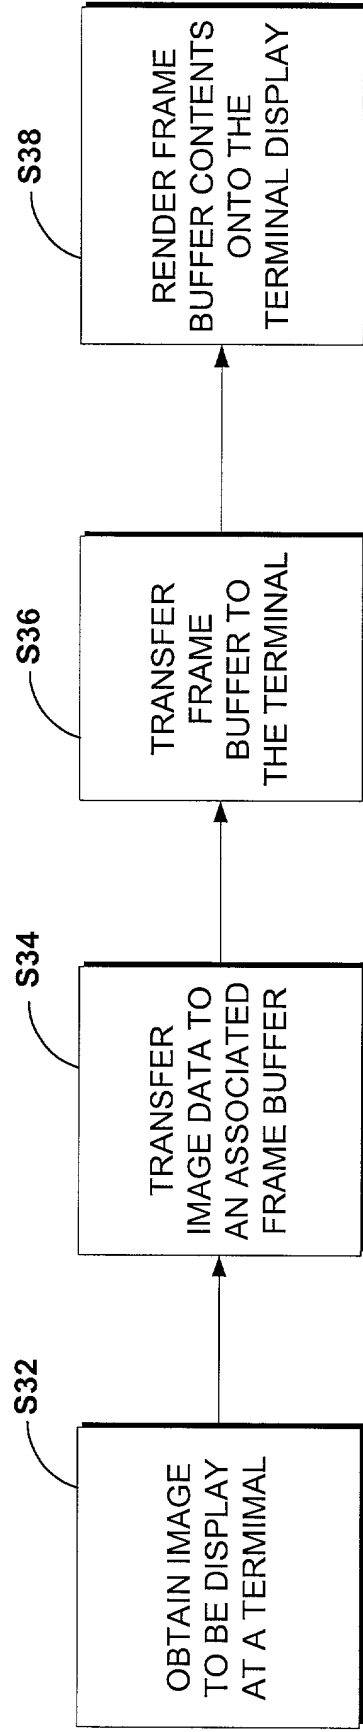


FIG. 3.

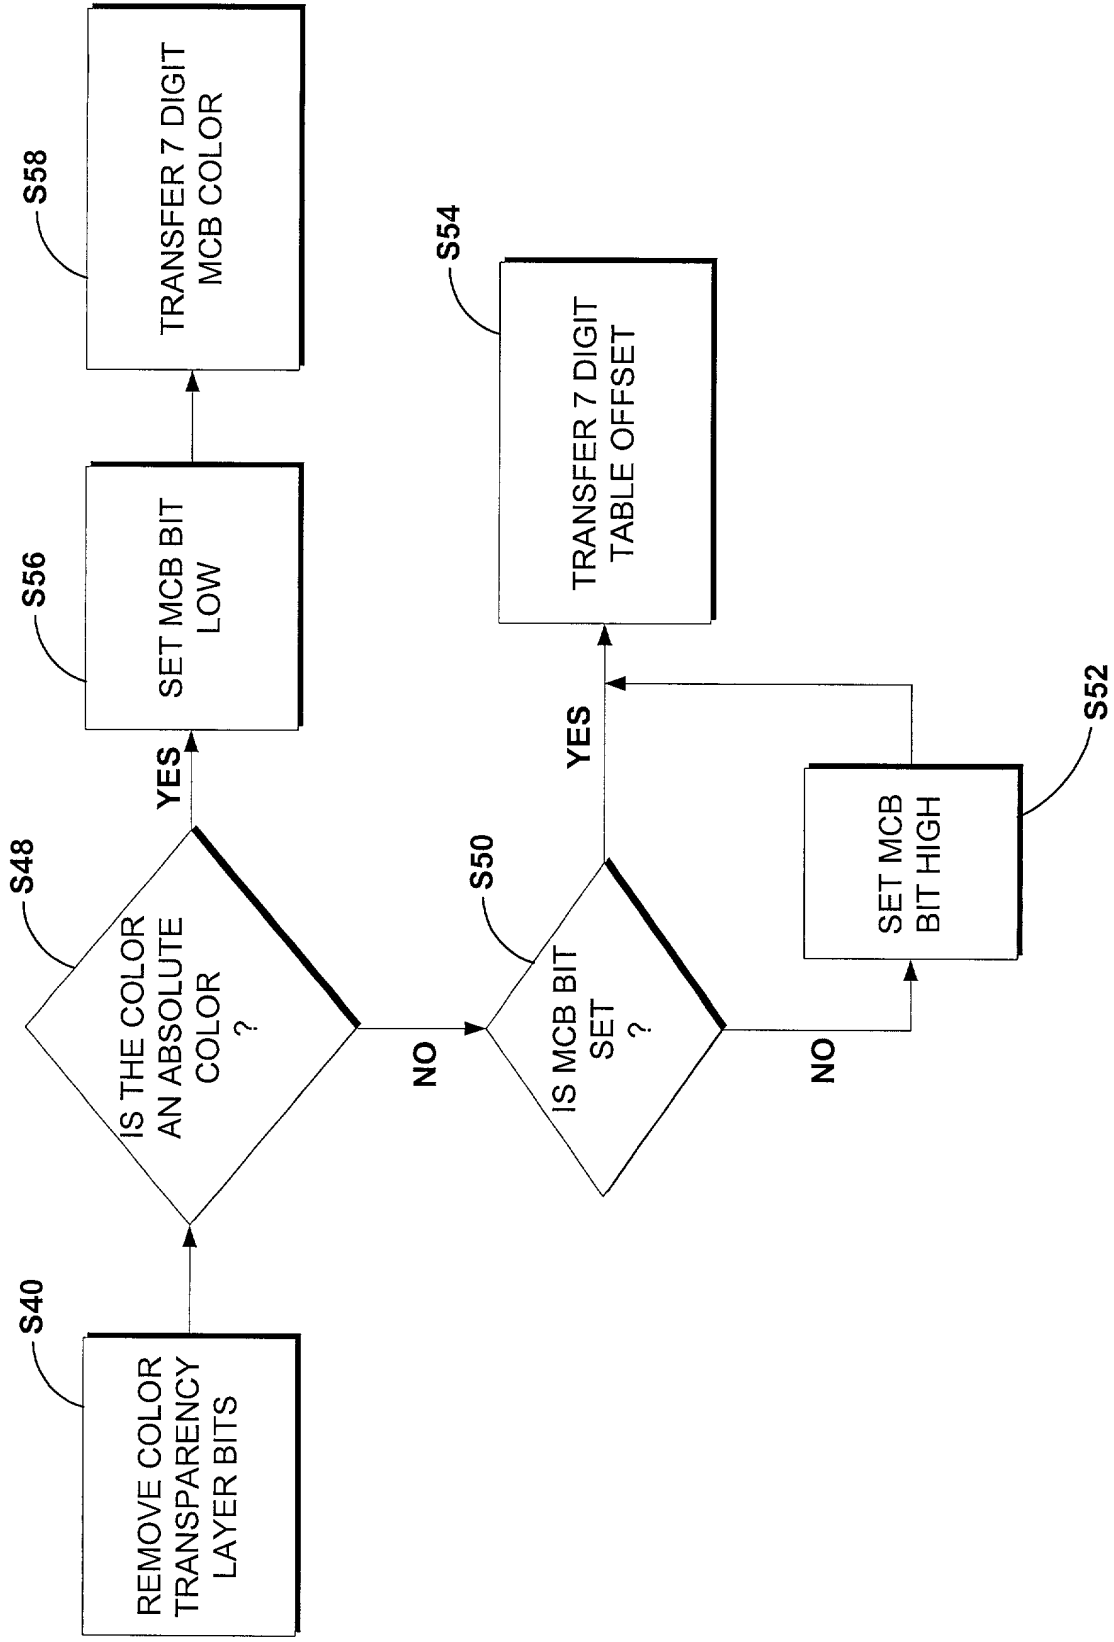


FIG. 4.

FIG. 5 is a block diagram of a system 42 for processing data. The system 42 includes a processor 44 and a memory 46. The processor 44 is connected to the memory 46. The processor 44 is configured to execute instructions stored in the memory 46. The memory 46 is configured to store data and instructions. The system 42 is configured to process data and generate output.

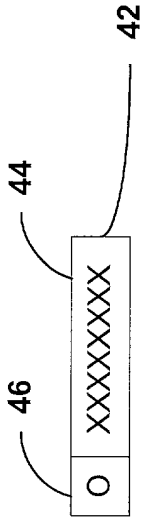


FIG. 5.

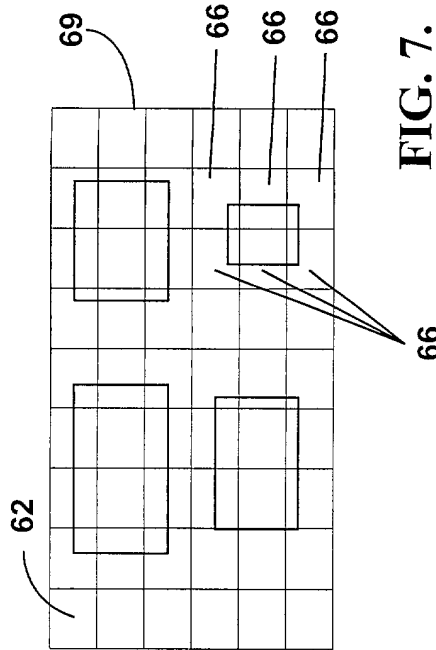
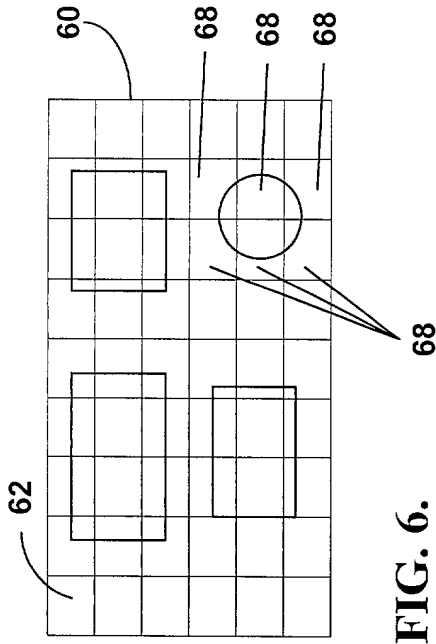


FIG. 8.

AB	CD	EF	GH	IJ	KL	MN	OP	QR
ST	UV	WX	YZ	12	34	56	78	90
00	01	02	03	04	05	06	07	08
09	10	11	12	13	14	15	16	17
18	19	20	21	22	23	24	25	26
27	28	29	30	31	32	33	34	35

FIG. 9.

AB	CD	EF	GH	IJ	KL	MN	OP	QQ
ST	UV	WX	YZ	11	34	56	78	90
00	01	02	03	04	05	06	07	08
09	10	11	12	13	14	15	16	18
18	19	20	21	22	23	24	25	26
27	28	33	30	31	32	33	34	35

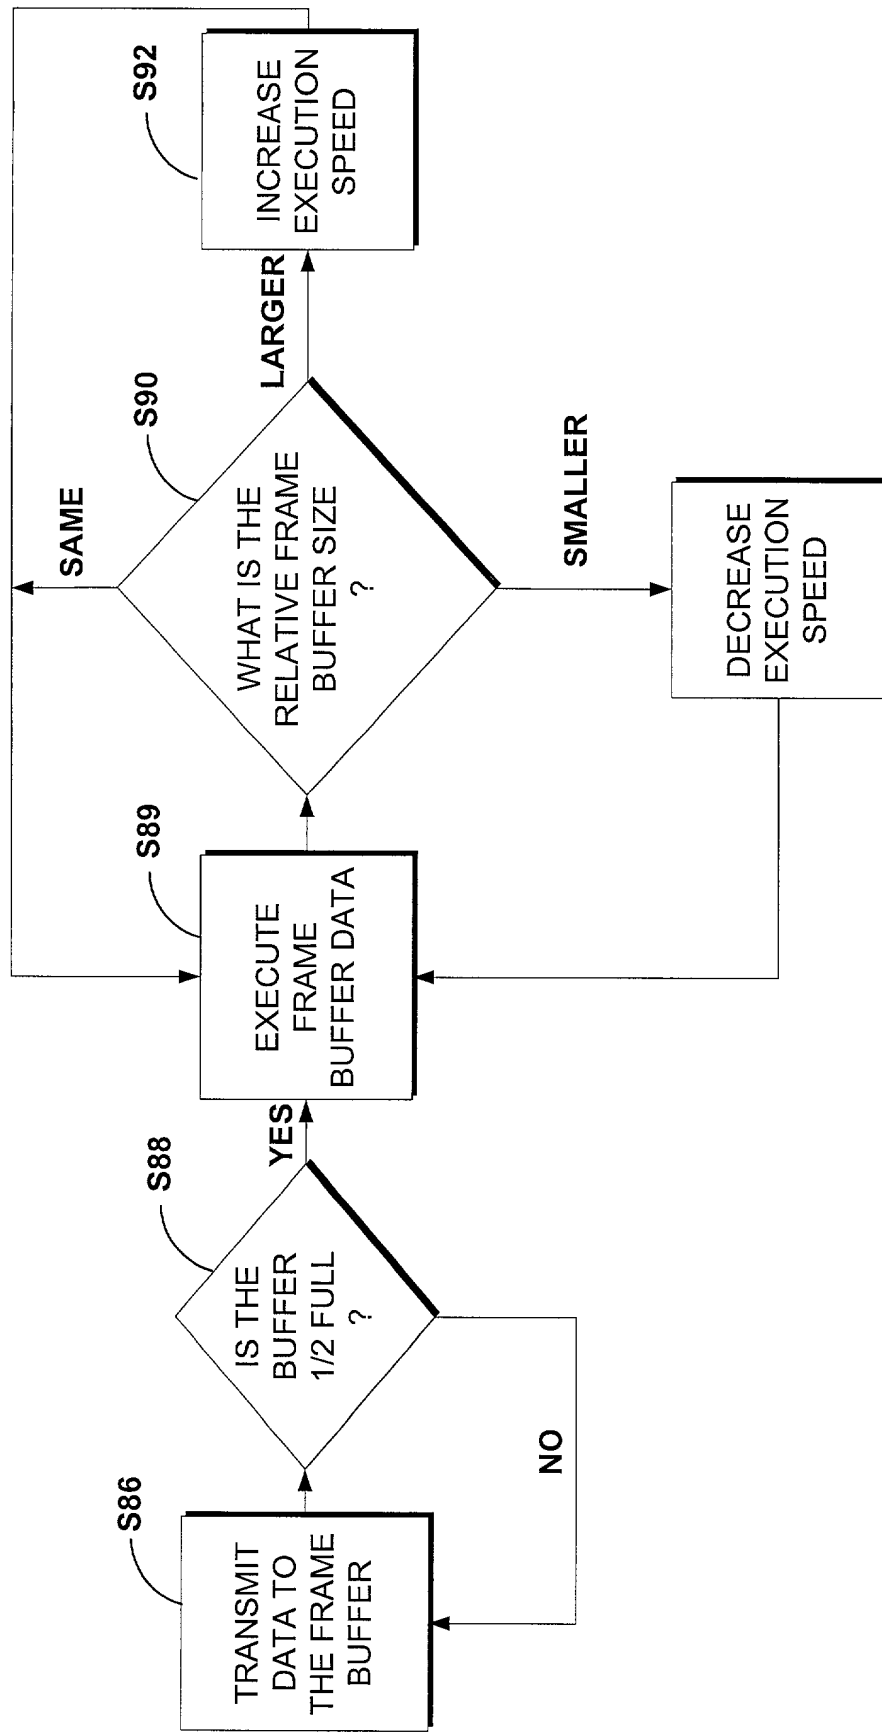


FIG. 10.

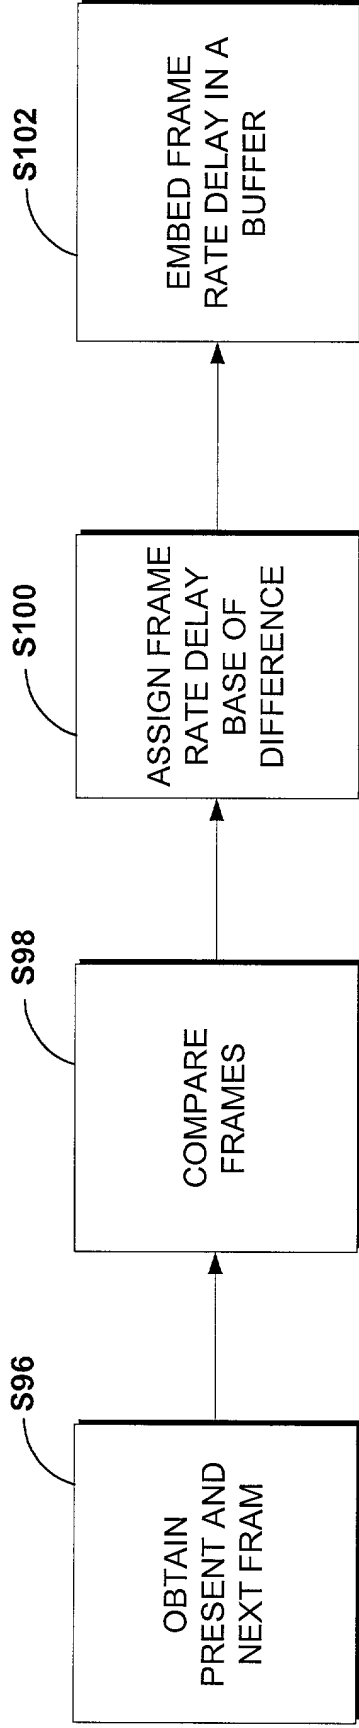


FIG. 11.

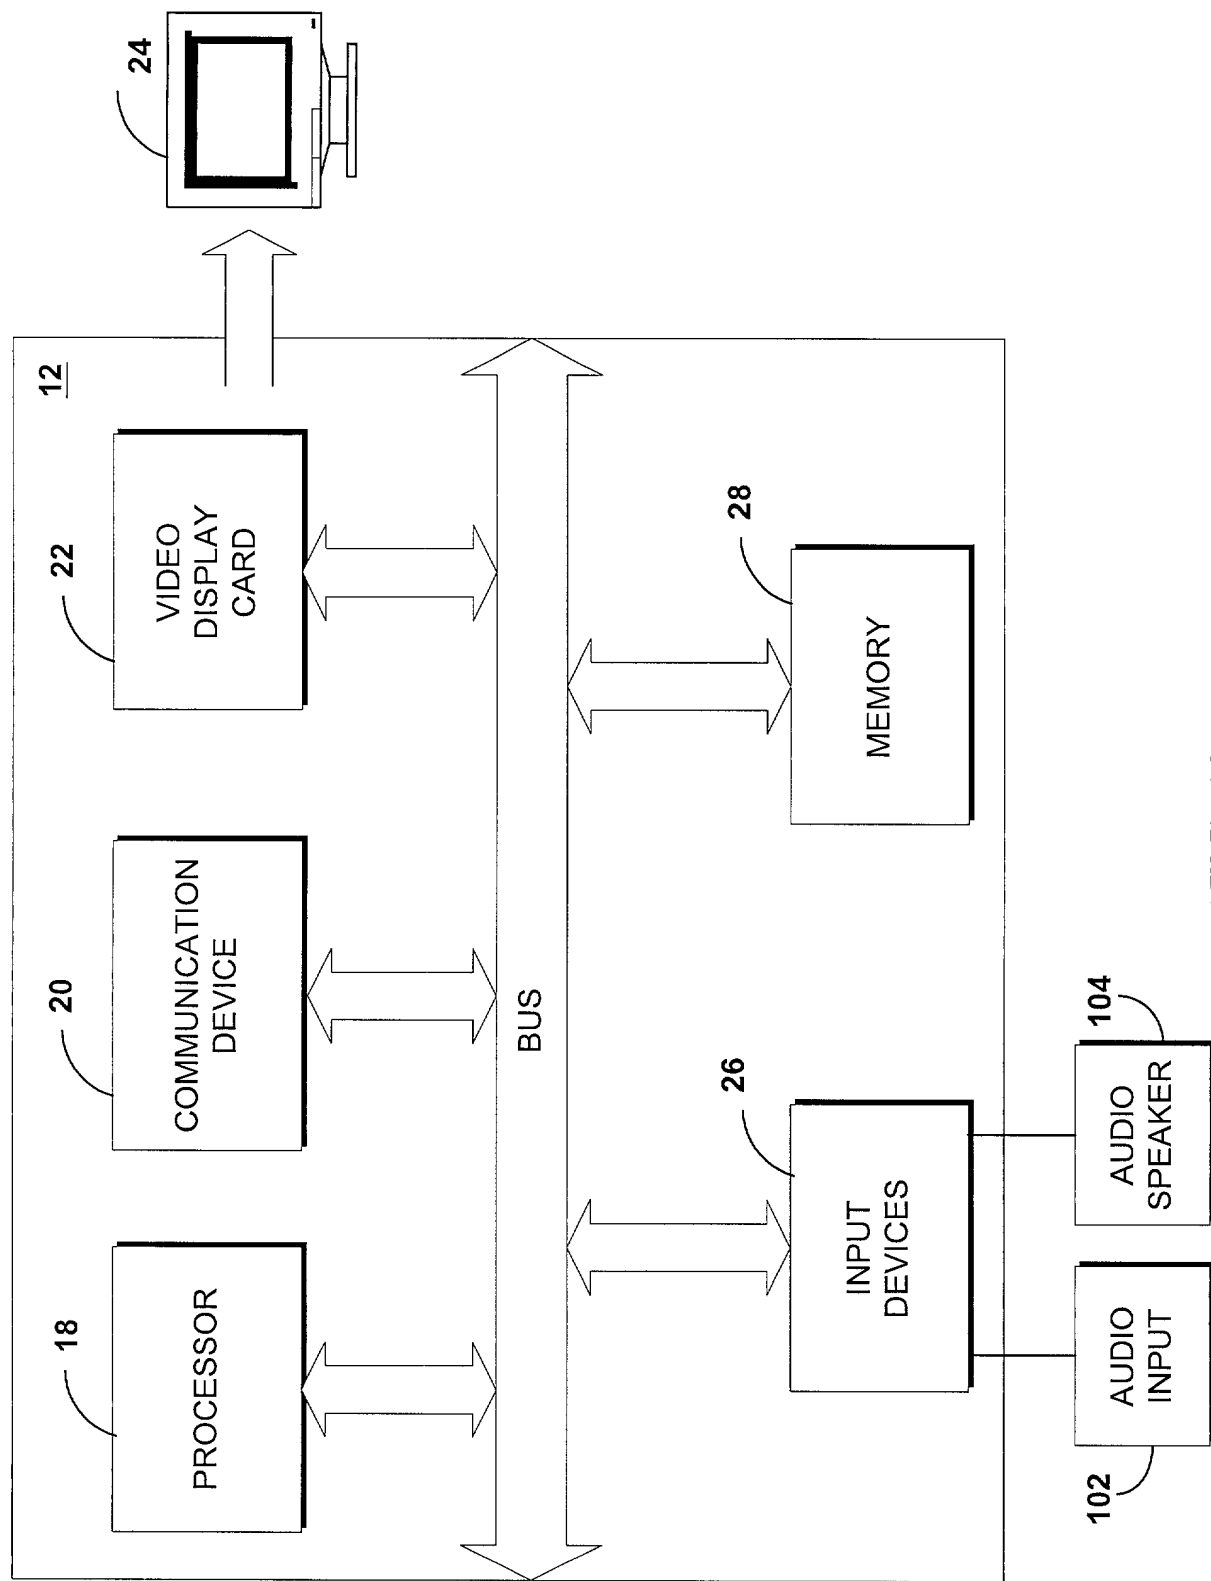


FIG. 12.